




Superior  
Manufacturing  
Group, Inc.

# 585 Eco Stance™

Anti-Fatigue/Anti-Slip Matting

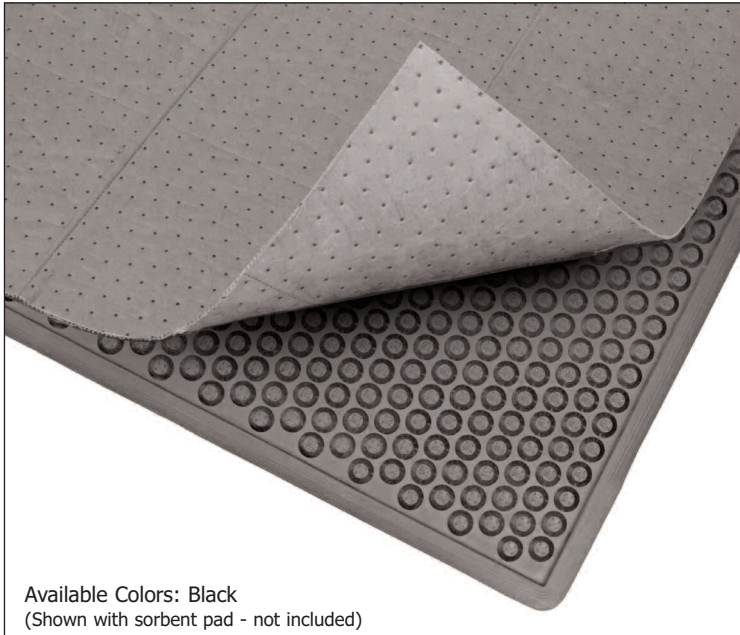

Available Colors: Black  
(Shown with sorbent pad - not included)



**E**co Stance™ is one of the first anti-fatigue mats designed specifically for combined use with a sorbent pad in wet applications where sorbent pads are often used to alleviate safety hazards. Traditionally, sorbent pads are placed either directly on the floor, or in a tray designed to hold them in place. Neither of these methods offers much in the way of anti-fatigue relief, and in extremely wet applications provides little or no slip resistance.

| Test                                     | Test Description  | *Results                                       |
|--|---|--|
| Compression Deflection                   | Test specimen was prepared and tested in accordance with applicable portions of test method ASTM D3574. (Compression force deflection @ 50%)  | 39.5 lbs/sq inch                               |
| Coefficient of Friction<br>ASTM C1028-96 | A neolite heel assembly with a predetermined load is pulled horizontally with a dynamometer to measure the force required to cause the assembly to slip.                                  | .74  |
| Abrasion Resistance<br>ASTM D3884-01     | Test specimen is subjected to the rubbing action of two abrading wheels under controlled conditions. Results measured in Weight loss (Grams)  | 1.43 Grams (2.03%)                             |
| Elongation<br>ASTM D412                  | Test specimen is stretched at a specified rate until breaking point. The results are measured in weight needed to break, and % of size increase at breaking point.                        | 60.1 lbs<br>692.8%<br>(average of 5 specimens) |
| Hardness<br>ASTM D2240-02                | The hardness of a test sample is measured by means of a type A Shore Durometer. It measures the penetration of its specified indenter forced into the material under specified conditions | 50   |

\*All testing of NoTrax® floor matting has been performed by an independent testing laboratory.

- 100% Nitrile rubber compound: provides the highest degree of resistance to chemicals, oils, and greases
- Molded bubble pattern on the surface of the mat provides cushioning comfort and aeration
- Molded beveled borders allow for easy access on to and off of the mat
- Recessed top surface acts as a tray holding sorbent pad and trapping liquids
- Thickness: 3/4"
- Stock Sizes: 3' x 5'
- Designed to comfortably accommodate a standard 30" wide sorbent pad (Inside tray width - 32")



Anti-Fatigue



Anti-Slip



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® ENTRANCE MATS