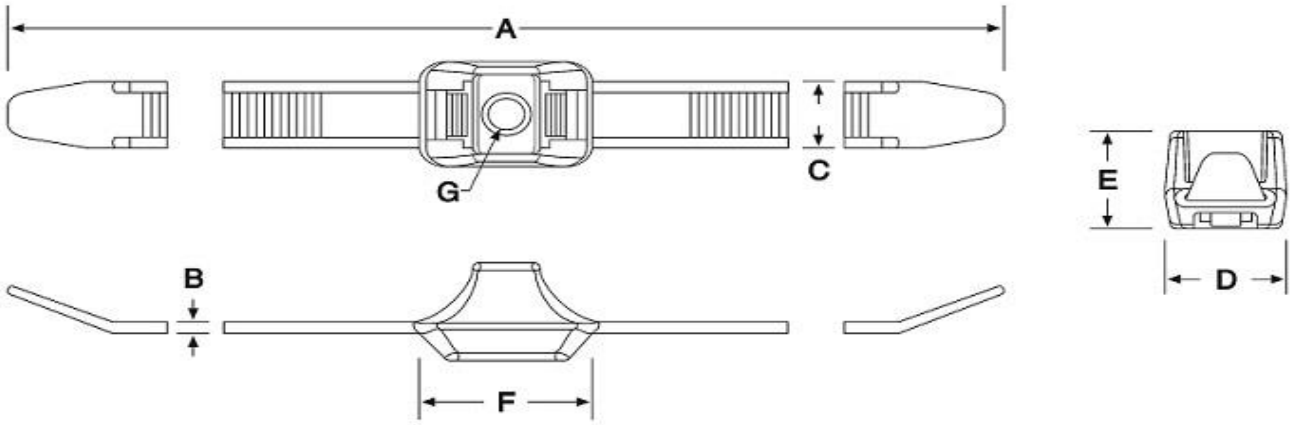

PART NUMBER	BUNDLE DIAMETER MAX IN (mm)	A IN (mm) +/- .125 (.762mm)	B IN (mm) +/- .005 (.127mm)	C IN (mm) +/- .005 (.127mm)	D IN (mm) +/- .020 (.508mm)	E IN (mm) +/- .020 (.508mm)	F IN (mm) +/- .030 (.762mm)	G IN (mm) +/- .005 (.127mm)	MIN LOOP TENSILE LBS (n)	ANSI/UL 94 Mtl FLAMABILITY RATING
CT-ACT-AL-13-150-DL-IT-30	1.30 (33.02mm)	13.547 (344.093mm)	.054 (1.371mm)	.503 (12.776mm)	.747 (18.973mm)	.741 (18.821mm)	1.107 (28.117mm)	.244 (6.197mm)	150 (670)	HB
CT-ACT-AL-19-150-DL-IT-30	2.30 (58.42mm)	19.818 (503.377mm)	.057 (1.447mm)	.505 (12.827mm)	.747 (18.923mm)	.741 (18.770mm)	1.122 (28.498mm)	.244 (6.172mm)	150 (670)	HB

150 LB. DUAL LOOP SERIES CABLE TIES WITH 1/4 INCH MOUNTING HOLE

COLOR DESIGNATIONS:

IT-30 = IMPACT RESISTANT, UV BLACK HEAT STABILIZED

MATERIAL:

NYLON 6/6 POLYAMIDE

REV	DATE	BY	CHK	APPROVE	DESCRIPTION
C	3/7/18	PB	EG	EG	DELETED HIGH TEMP FROM COLOR DESIGNATION
B	1/25/18	PB	VA	VA	UPDATE DIMENSIONS
A	1/8/2018	PB	VA	VA	INTITIAL RELEASE

SHEET 1 OF 1

REV.: C

DATE

1/8/18

CHECK

SCALE

NONE