



DATE	REV	DESCRIPTION	BY	CHKD

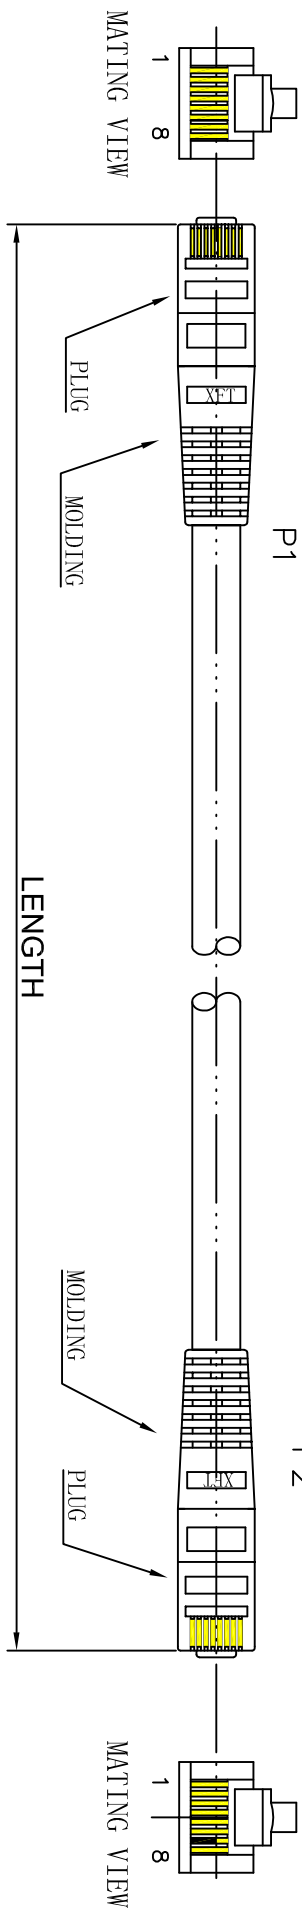


Marking: YFC CAT. 6 UTP ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B.2-1 ETL/3P VERIFIED
 -24AWG X 4P PATCH TYPE CM(UL) C(UL) CMH E164469-F3

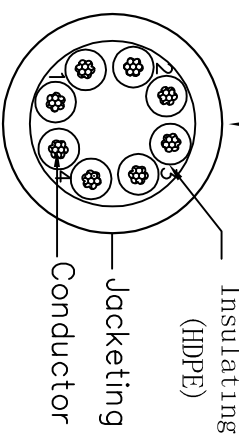

orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown

Conductor	Bare Copper 24AWG 7/0.196 ± 0.015mm
Insulation	Thickness: MIN at any point 0.15mm MAX AVG 0.25mm Diameter: 1.04 ± 0.06mm
Jacketing PVC	Thickness: MIN at any point 0.46mm MAX AVG 0.58mm Diameter: 5.9 ± 0.15mm

WIRE	CAT6 UTP STR 24AWG
PLUG	YUS-04
Length	X M
WIRE COLOR	X

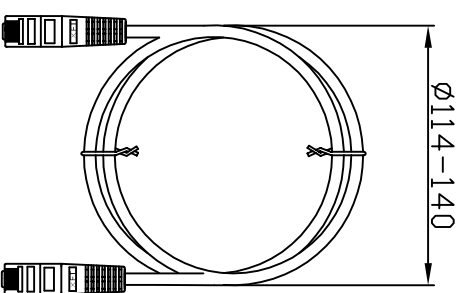

PA/R	PINOUT			
	P1 (1568B)	WIRE	P2 (1568A)	
1	1	WHT/ORG	3	
	2	ORG	6	
2	3	WHT/GRN	1	
	6	GRN	2	
3	4	BLU	4	
	5	WHT/BLU	5	
4	7	WHT/BRN	7	
	8	BRN	8	

Unless specified on the drawing, tolerances are per the follows:

.X	± 1
.XX	± 0.2
.XXX	± 0.05



3RD	MM	SHEET	1	OF	1
DRAW. NO	YUS-04	ITEM	CAT6 UTP STR 24AWG		
DEPARTMENT		DRAW	尚文华	DATE	2006/08/29
SCALE		CHECKER		APPROVAL	
UNIT	MM	SHEET	1	OF	1