



DATE	REV	DESCRIPTION	BY	CHKD

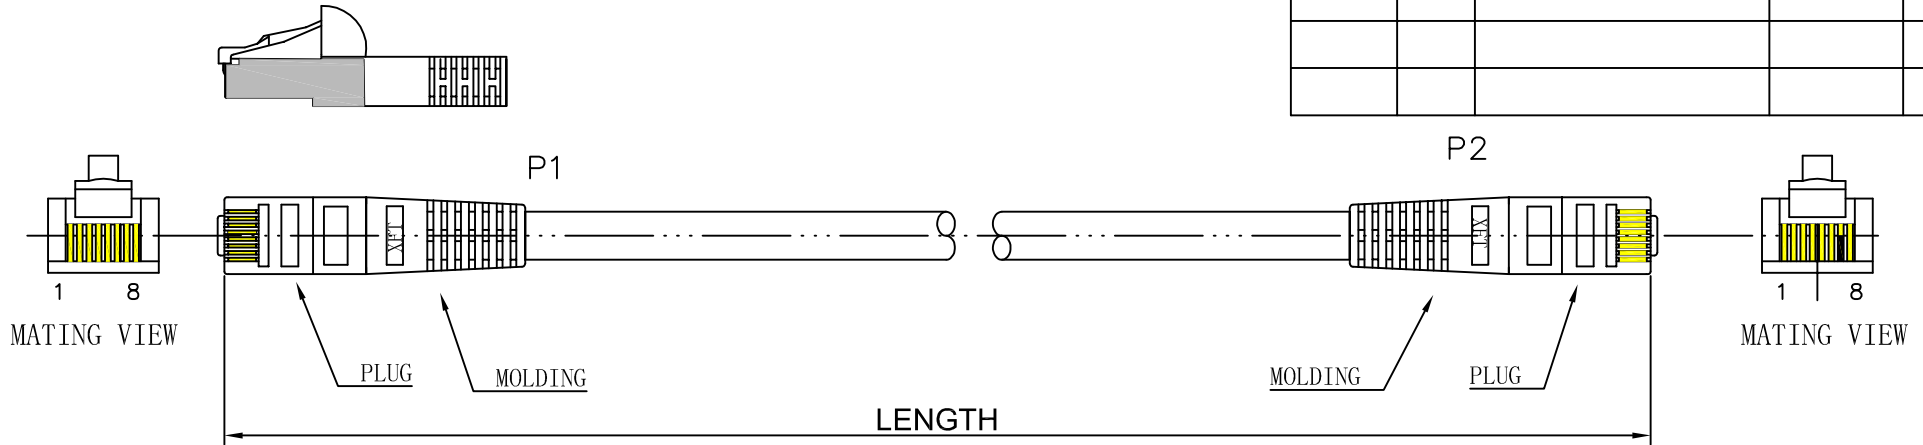


Marking: YFC CAT.6 26AWG×4P SSTP IEC 60332.1 PATCH CABLE-CONFORM
 TO ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B.2-1 3P/ETL VERIFIED
 CM(UL) C(UL) CMH E164469-F3

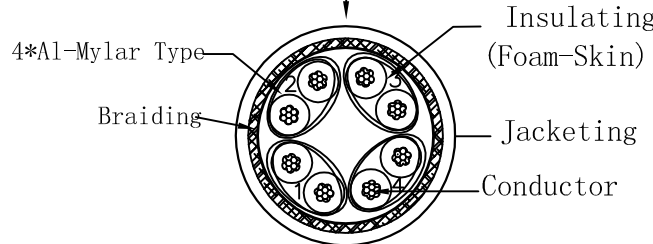

Conductor	Bare Copper 26AWG 7/0.16±0.015mm
Insulation	Thickness:MIN at any point:0.2mm MAX AVG:0.35mm Diameter:1.05±0.05mm
Jacketing	Thickness:MIN at any point:0.46mm MAX AVG:0.58mm Diameter:6.1±0.2mm

WIRE	CAT.6 SSTP STR 26AWG
PLUG	YUS-04
Length	××M
WIRE COLOR	×

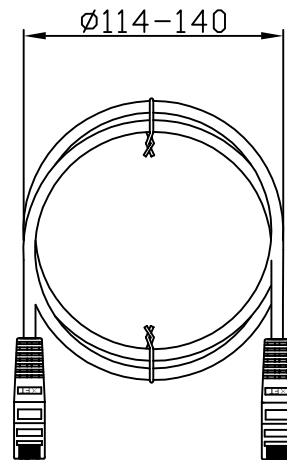


orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown

PA/R	PINOUT		
	P1 (T568B)	WIRE	P2 (T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

Unless specified on the drawing, tolerances are per the follows:

.	± 1
.X	± 0.2
.XX	± 0.05

3RD



DRAW.NO	YUS-04	ITEM	CAT.6 SSTP STR 26AWG		
DEPARTMENT		DRAW	尚文华	DATE	2006/08/29
SCALE		CHECKER		APPROVAL	
UNIT	MM	SHEET	1	OF	1