




DATE	REV	DESCRIPTION	BY	CHKD

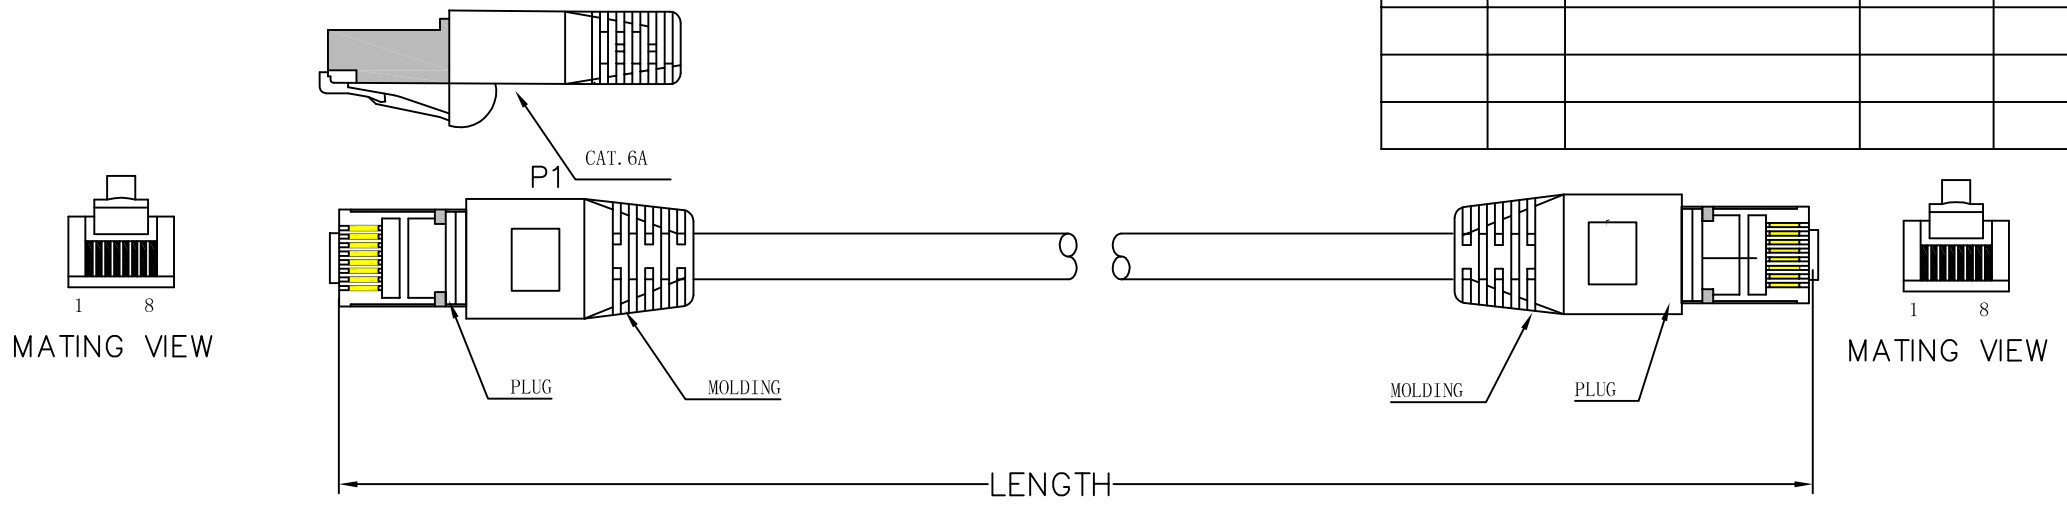

<LP631> YFC CAT.6A SSTP 10 GIGABIT ETHERNET PATCH CABLE ISO/IEC 11801 & EN 50288 & TIA/EIA-568-B.2 & IEC 332.1 26AWGX4P TYPE CM (UL) C(UL) CMH E164469-F3

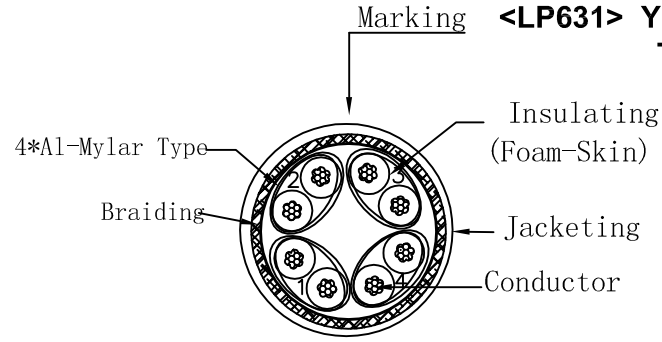

PA/R	PINOUT		
	P1 (T568B)	WIRE	P2 (T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	4	GRN	4
3	5	BLU	5
	6	WHT/BLU	6
4	7	WHT/BRN	7
	8	BRN	8
BRAID			



Conductor	Bare Copper 26AWG 7/0.152±0.005mm
Insulation	Thickness:MIN at any point:0.2mm MAX AVG:0.35mm Diameter:1.05±0.06mm
Jacketing PVC	Thickness:MIN at any point:0.46mm MAX AVG:0.58mm Diameter:6.1±0.2mm

Wire	CAT. 6A P1MF STR 26AWG *4P
Plug	YS-02
Length	XX
Wire Color	XX

Unless specified on the drawing, tolerances are per the follows:
 .x ± 1
 .x ± 0.2
 .XX ± 0.05

3RD

DRAW.NO	YS-02	ITEM			
DEPARTMENT		DRAW	ZHD	DATE	2008/6/30
SCALE		CHECKER	APPROVAL		
UNIT	MM	SHEET	1	OF	1