

16AWG 2C AUDIO CABLE DIRECT BURIAL



DESCRIPTION

16AWG, 2 Conductor, Stranded (65 Strand), PVC Jacket, for Direct Burial.


FEATURES

- Suitable for Direct Burial
- Durable Weather Resistant Jacket
- High-Strand Oxygen Free
- Bare Copper Conductors
- ETL Listed, CL2 Rated
- 500ft Pull Box



SKU: 209-2315/DB

Conductor	2 Core (Stranded BC)
Material	Oxygen Free Cooper Wire Strands
Size	16AWG
Stranding	65 Strands
Strand Dia.	0.16 mm
Insulation	
Material	PVC
Average Thickness	0.31 mm
Min. Point Thickness	0.27 mm
Diameter (±0.05mm)	2.10 mm
Assembly Dia. (±0.05mm)	4.10mm
Jacket	
Material	PVC
Color	Black
Average Thickness	0.95 mm
Min. Point Thickness	0.88 mm
Outer Diameter (±0.1mm)	6.00 mm
Color of Conductor Jacket Ripcord	Black, Red
Material	Nylon (150D)
Electrical Performance	
Rated Temperature	-20°C - 75°C
Rated Voltage	300V
Reference Standard	ETL Listed

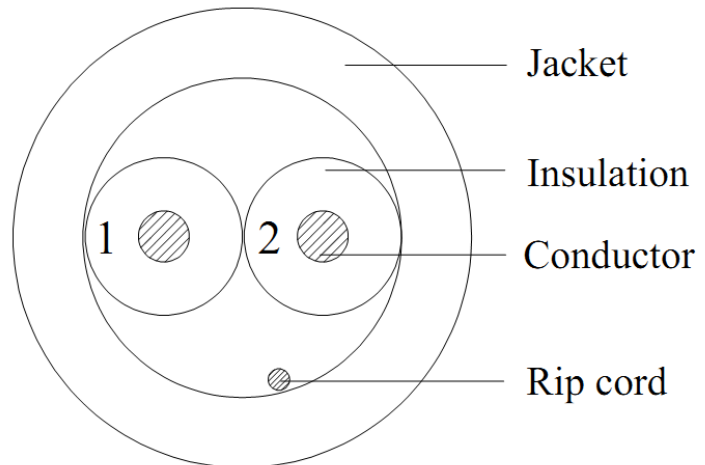

VERTICAL CABLE

954 454-3554 Florida Office
951 696-7772 California Office



www.verticalcable.com

Rev. 12/2011
Subject to change without notice.